



FIG.1

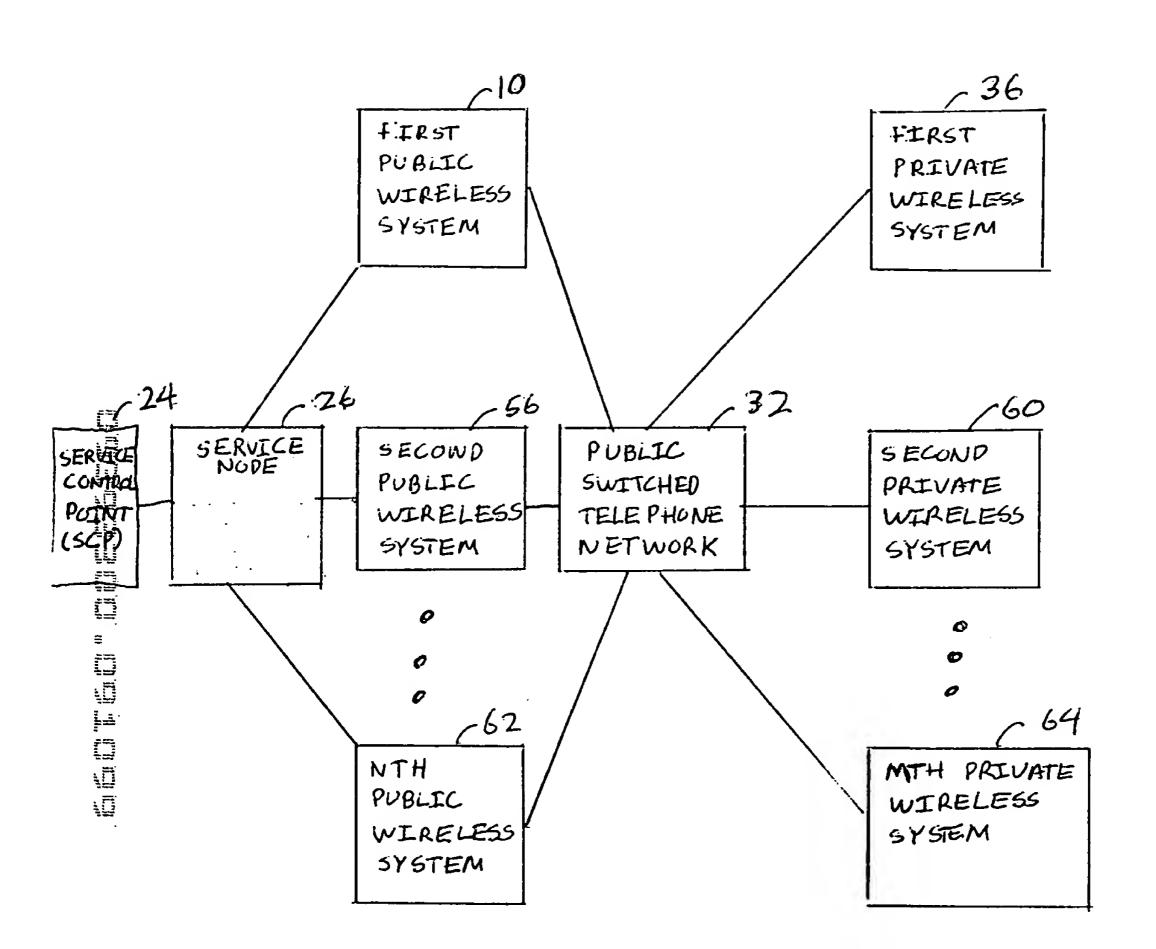



3 . . .

FIG.2

## FIG. 3

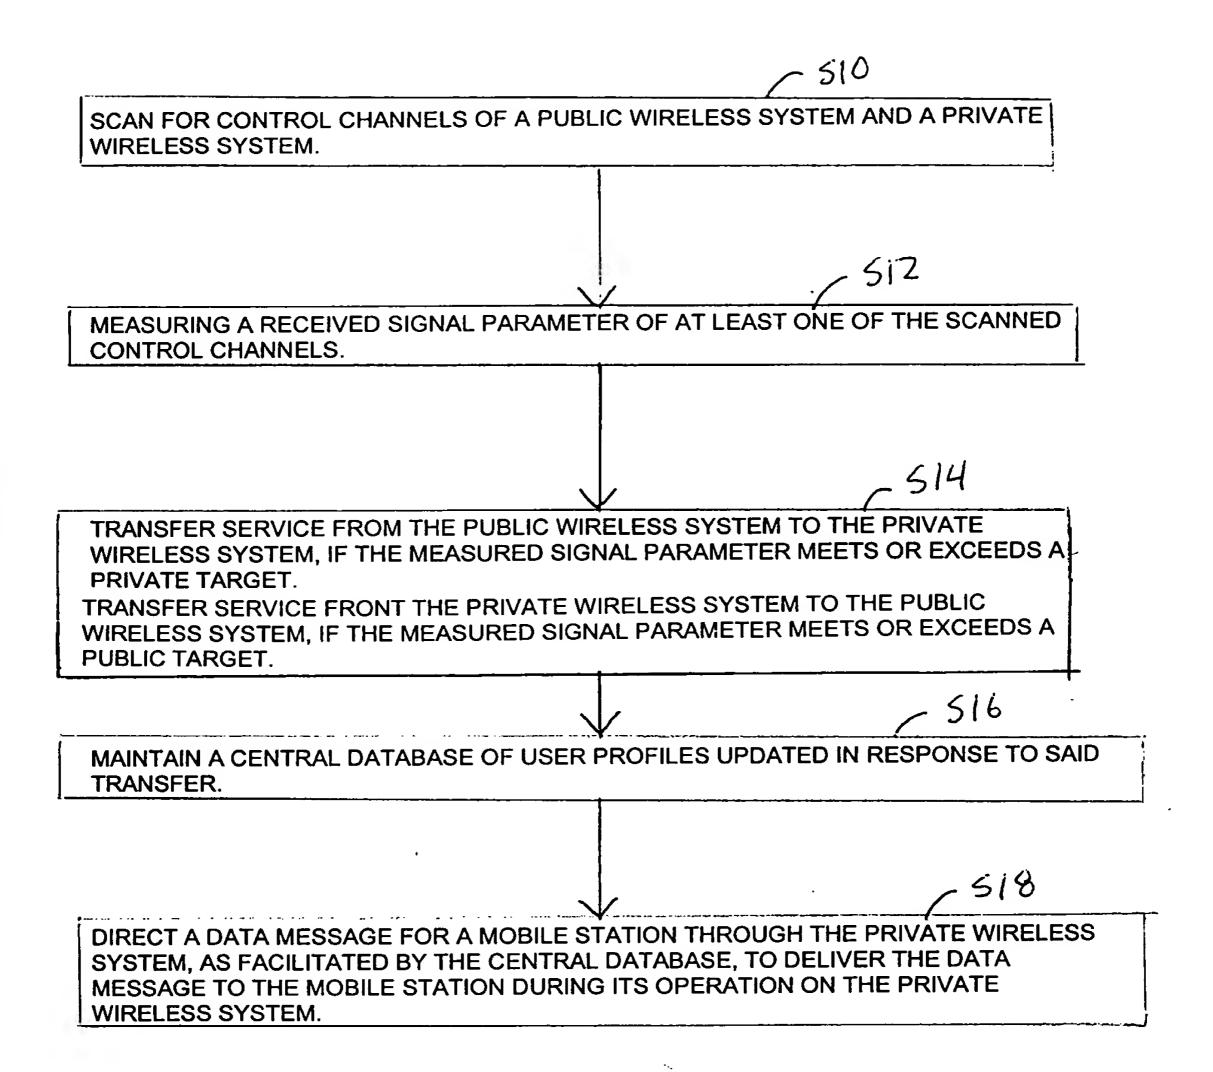

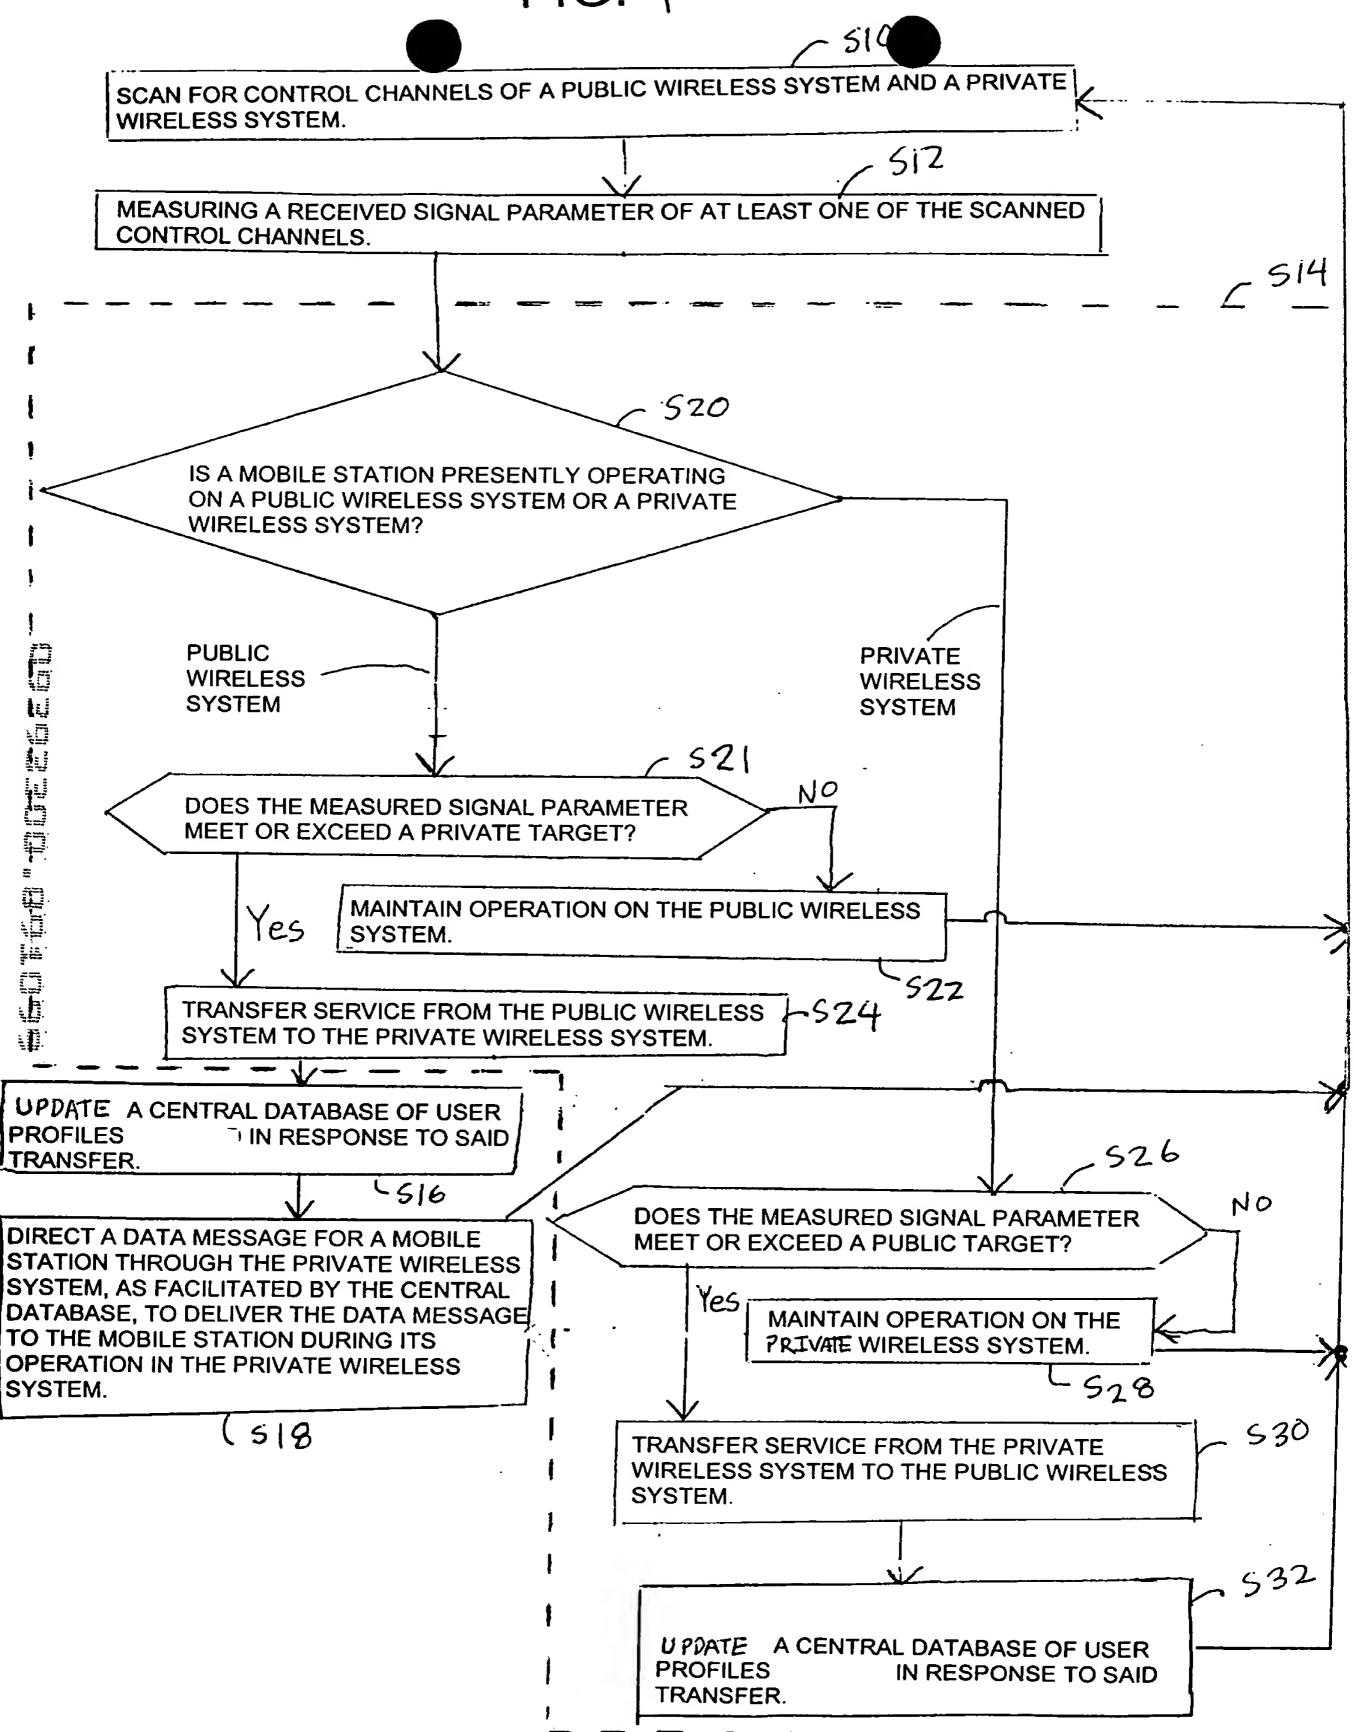

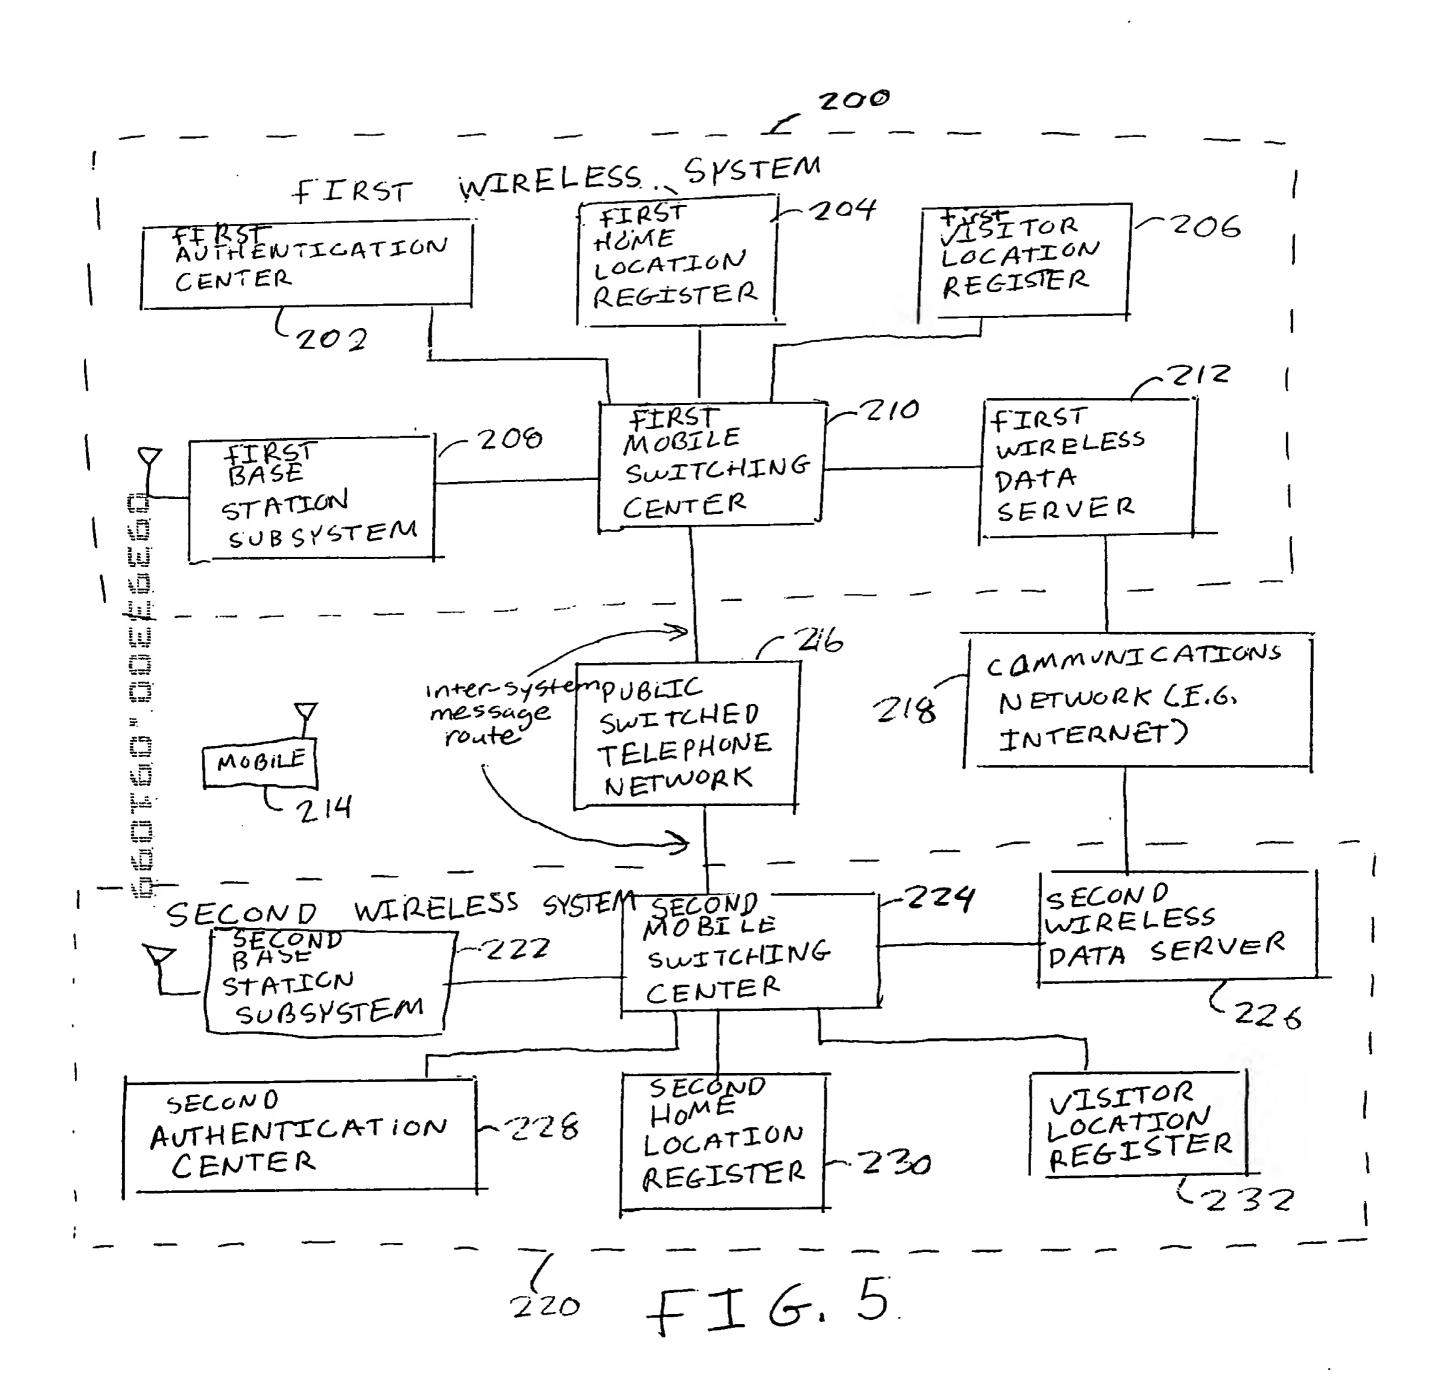

7 , , ,

## FIG. 6

5100

DETECT ROAMING OF MOBILE STATION FROM A FIRST COVERAGE OF A FIRST WIRELESS SYSTEM TO A SECOND COVERAGE AREA OF A SECOND WIRELESS SYSTEM.

5102

UPDATE A FIRST HOME LOCATION REGISTER OF THE FIRST WIRELESS SYSTEM WITH A LOCATION UPDATE MESSAGE FROM A SECOND VISITOR LOCATION REGISTER OF THE SECOND WIRELESS DATA NETWORK.

-5104

TRANSFER A MOBILE DATA PROFILE OF THE MOBILE STATION FROM A FIRST WIRELESS DATA SERVER TO A SECOND WIRELESS DATA SERVER IN RESPONSE TO THE LOCATION UPDATE MESSAGE.

5106

SERVE THE VISITING MOBILE STATION IN THE SECOND WIRELESS COVERAGE AREA VIA A SECOND WIRELESS DATA SERVER, AS OPPOSED TO A FIRST WIRELESS DATA SERVER OF THE FIRST COVERAGE AREA, TO REDUCE INTER-SYSTEM SIGNALING MESSAGES SENT BETWEEN THE FIRST WIRELESS SYSTEM AND THE SECOND WIRELESS SYSTEM.